


LED WELL LIGHTS

12FX-12V-240

Product Description

This water tight spot light is designed for in ground use where a flush, or hidden light would be ideal. Constructed of Fiberglass. All types of our MR16 lamps can be used on this unit to achieve the effect you want.

Product Dimensions

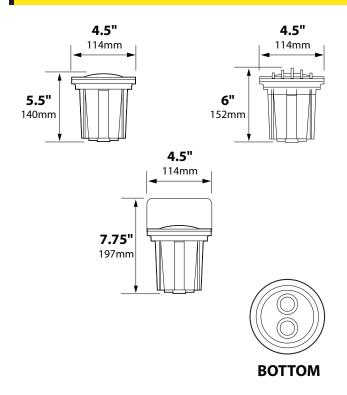

Features & Benefits

- » Available with angled cap
- » Available with ARROW SAVER LED



Specifications

» Construction:

Black extruded ABS housing; cast aluminum or cast brass fixture; cast aluminum or cast brass lens holder & high impact clear tempered convex glass lens

- » Interior Fixture Lens:High Impact clear temered flat glass
- » Lamp Supplied: 20w MR16 FL (BAB) 5000 hours average rating (35w max)
- » Lamp Options: We recommend 4w ARROW LED or 6w LED; 50,000 hour or ARROW SAVER 4w LED; 40,000 hour
- Socket: High temperature ceramic GU5.3 bi-pin with 250° silicone lead wires
- Wiring: Black 3' 18/2 zip cord from base of fixture (12v only) or 25' 16/2 fixture lead wire
- Connection: Quick Connector (not supplied) from fixture to main cable
- » Finish: Aluminum Black texture polyester powder coat.
 Optional finishes available.
 Brass- Unfinished Brass. Optional finishes available

Certifications





LED WELL LIGHTS12FX-12V-240

Example Order: 12SL-12V-240-A-01-BLT

VTION	12FX-12V-240	2 3	
ORDERING INFORMA	1. MATERIAL (LENS HOLDER/GRATE) A: ALUMINUM	2. LAMP 01: 20w MR16 FL (BAB)	3. COLOR BLT: BLACK TEXTURE (STANDARD) ATV: ANTIQUE VERDE BRT: BRONZE TEXTURE CAM: CAMEL TONE CPR: CHROME POWDER HTX: HUNTER TEXTURE RBV: RUBBED VERDE RST: RUST STU: STUCCO WBR: WEATHERED BROWN WIR: WEATHERED IRON BAR: BRASS ACID VERDE BAT: BRASS BLACK ACID